


# CORRUGATED

www.adtechnologies.com



Telco/CATV Markets  
800-847-7661

Energy Markets & Pressure Pipe  
800-321-7914

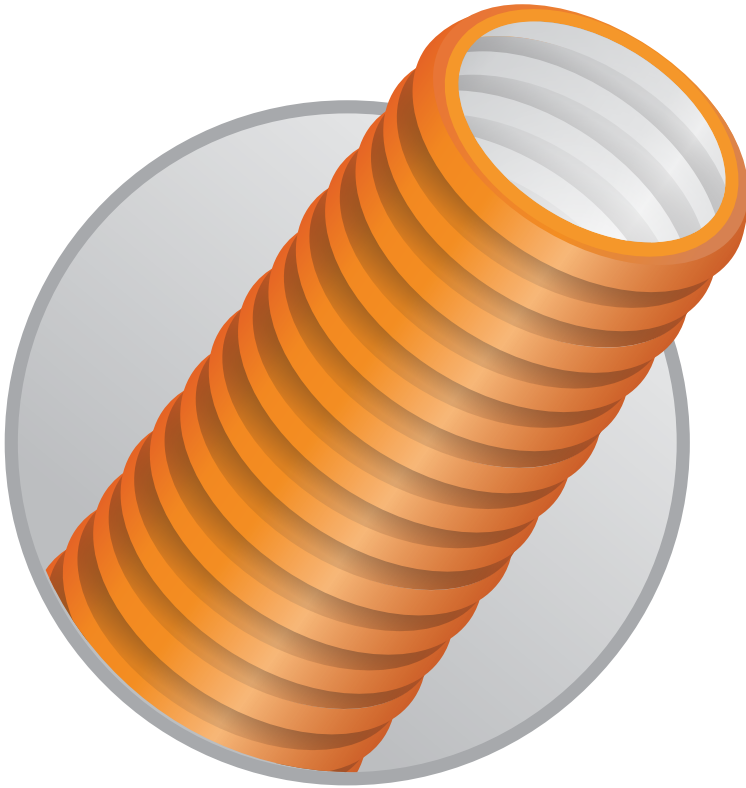

## FEATURES:

- Available in 1", 1 ¼", 1 ½", 2"
- Manufactured from flexible HDPE
- Continuous lengths on reels or in coils
- Rugged corrugated design is flexible and light weight, yet provides excellent crush resistance
- Outstanding long term cable protection from shifting ground, rock and root impingement
- Provides a permanent pathway, simplifies future cable repairs or replacement
- Available with UV protectant for above ground applications
- Plenum and Riser products available

## INSTALLATION APPLICATION:

Existing Conduit, Direct Burial, Aerial, Indoor, Short Runs

## MARKET APPLICATION:



## COLOR/STRIPE:



## OPTIONS:

**FOOTAGE MARKINGS** Sequential foot or meter markings. Custom print streams available.

SILICORE™



SILICORE is co-extruded with the tough HDPE jacket creating a super, slick permanent lining. SILICORE lined ducts allow for higher speed cable jetting and longer cable pulls.

**PREINSTALLED TAPE**

Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™, ensures extra slack at any access point throughout the reel. Available 500lb - 1,800lb tensile strength or locatable.

**SPECIFICATIONS:**

| Nominal Size | OD (in.)    | Wall Thick. (min. in.) | Wall Thick. (max. in.) | ID Ref. | Safe Working Pull Strength | Weight lb/ft | Bend Radius | Brittleness Temp. |
|--------------|-------------|------------------------|------------------------|---------|----------------------------|--------------|-------------|-------------------|
| 1"           | 1.330±0.010 | 0.045                  | 0.065                  | 1.220   | 500 lbs                    | 0.121        | 14          | -75°C             |
| 1 ¼"         | 1.550±0.010 | 0.045                  | 0.065                  | 1.440   | 500 lbs                    | 0.141        | 16          | -75°C             |
| 1 ½"         | 1.800±0.010 | 0.055                  | 0.075                  | 1.670   | 500 lbs                    | 0.165        | 19          | -75°C             |
| 2"           | 2.265±0.010 | 0.055                  | 0.075                  | 2.135   | 500 lbs                    | 0.196        | 22          | -75°C             |

